




Unit 21D Holmethorpe Avenue  
Redhill, Surrey RH1 2NB

**DAVIS INDUSTRIAL FILTERS LTD**

Tel : +44 (0)845 273 5025  
Fax : +44 (0)845 273 5026

## ➤ Specification & Optional Variants

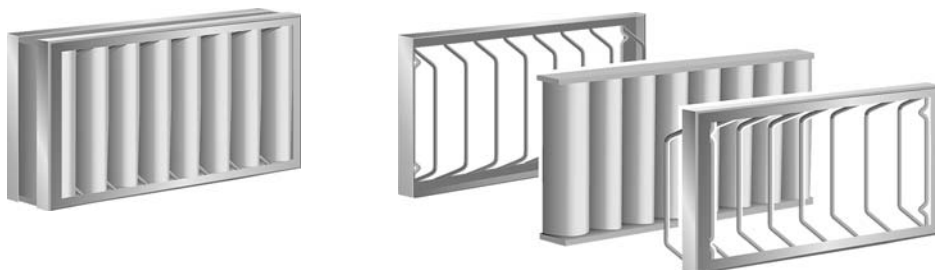


### Element Specification (Foam Media)

Medium Hard Flexible Polyether Polyurethane foam containing a flame retardant additive to reduce ease of ignition. Colour as Standard is Dark Grey.

Physical Properties : Measured in accordance with BS4443 testing of Flexible Cellular Material. Nominal Density is 30/33 Kg/m<sup>3</sup>, Tensile strength is 70 Kpa min.

### Airflow Characteristics (Standard Panel Depth)

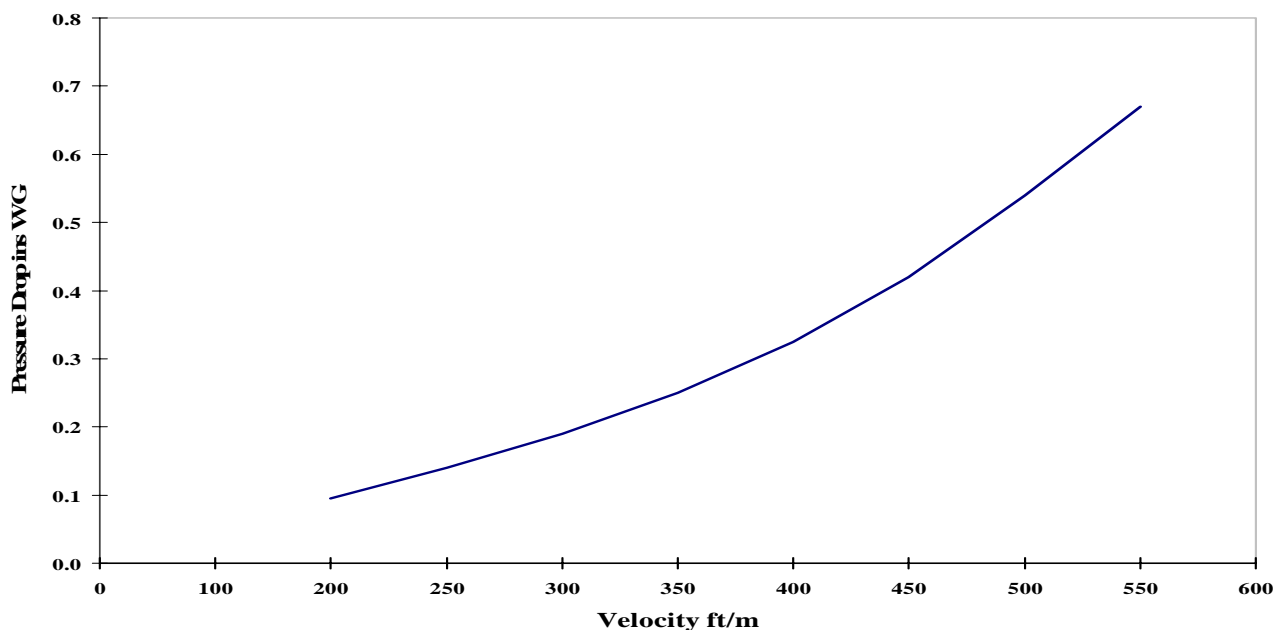

### Individual Client Variants

Stainless Steel – 404 or 316 grade  
Modification of usual Split Frame,  
including handles or solid surround  
Inclusion of Safety Mesh Screen  
Addition of Client Part Reference

